CONTENITORI IMPILABILI
STACKABLE CRATES

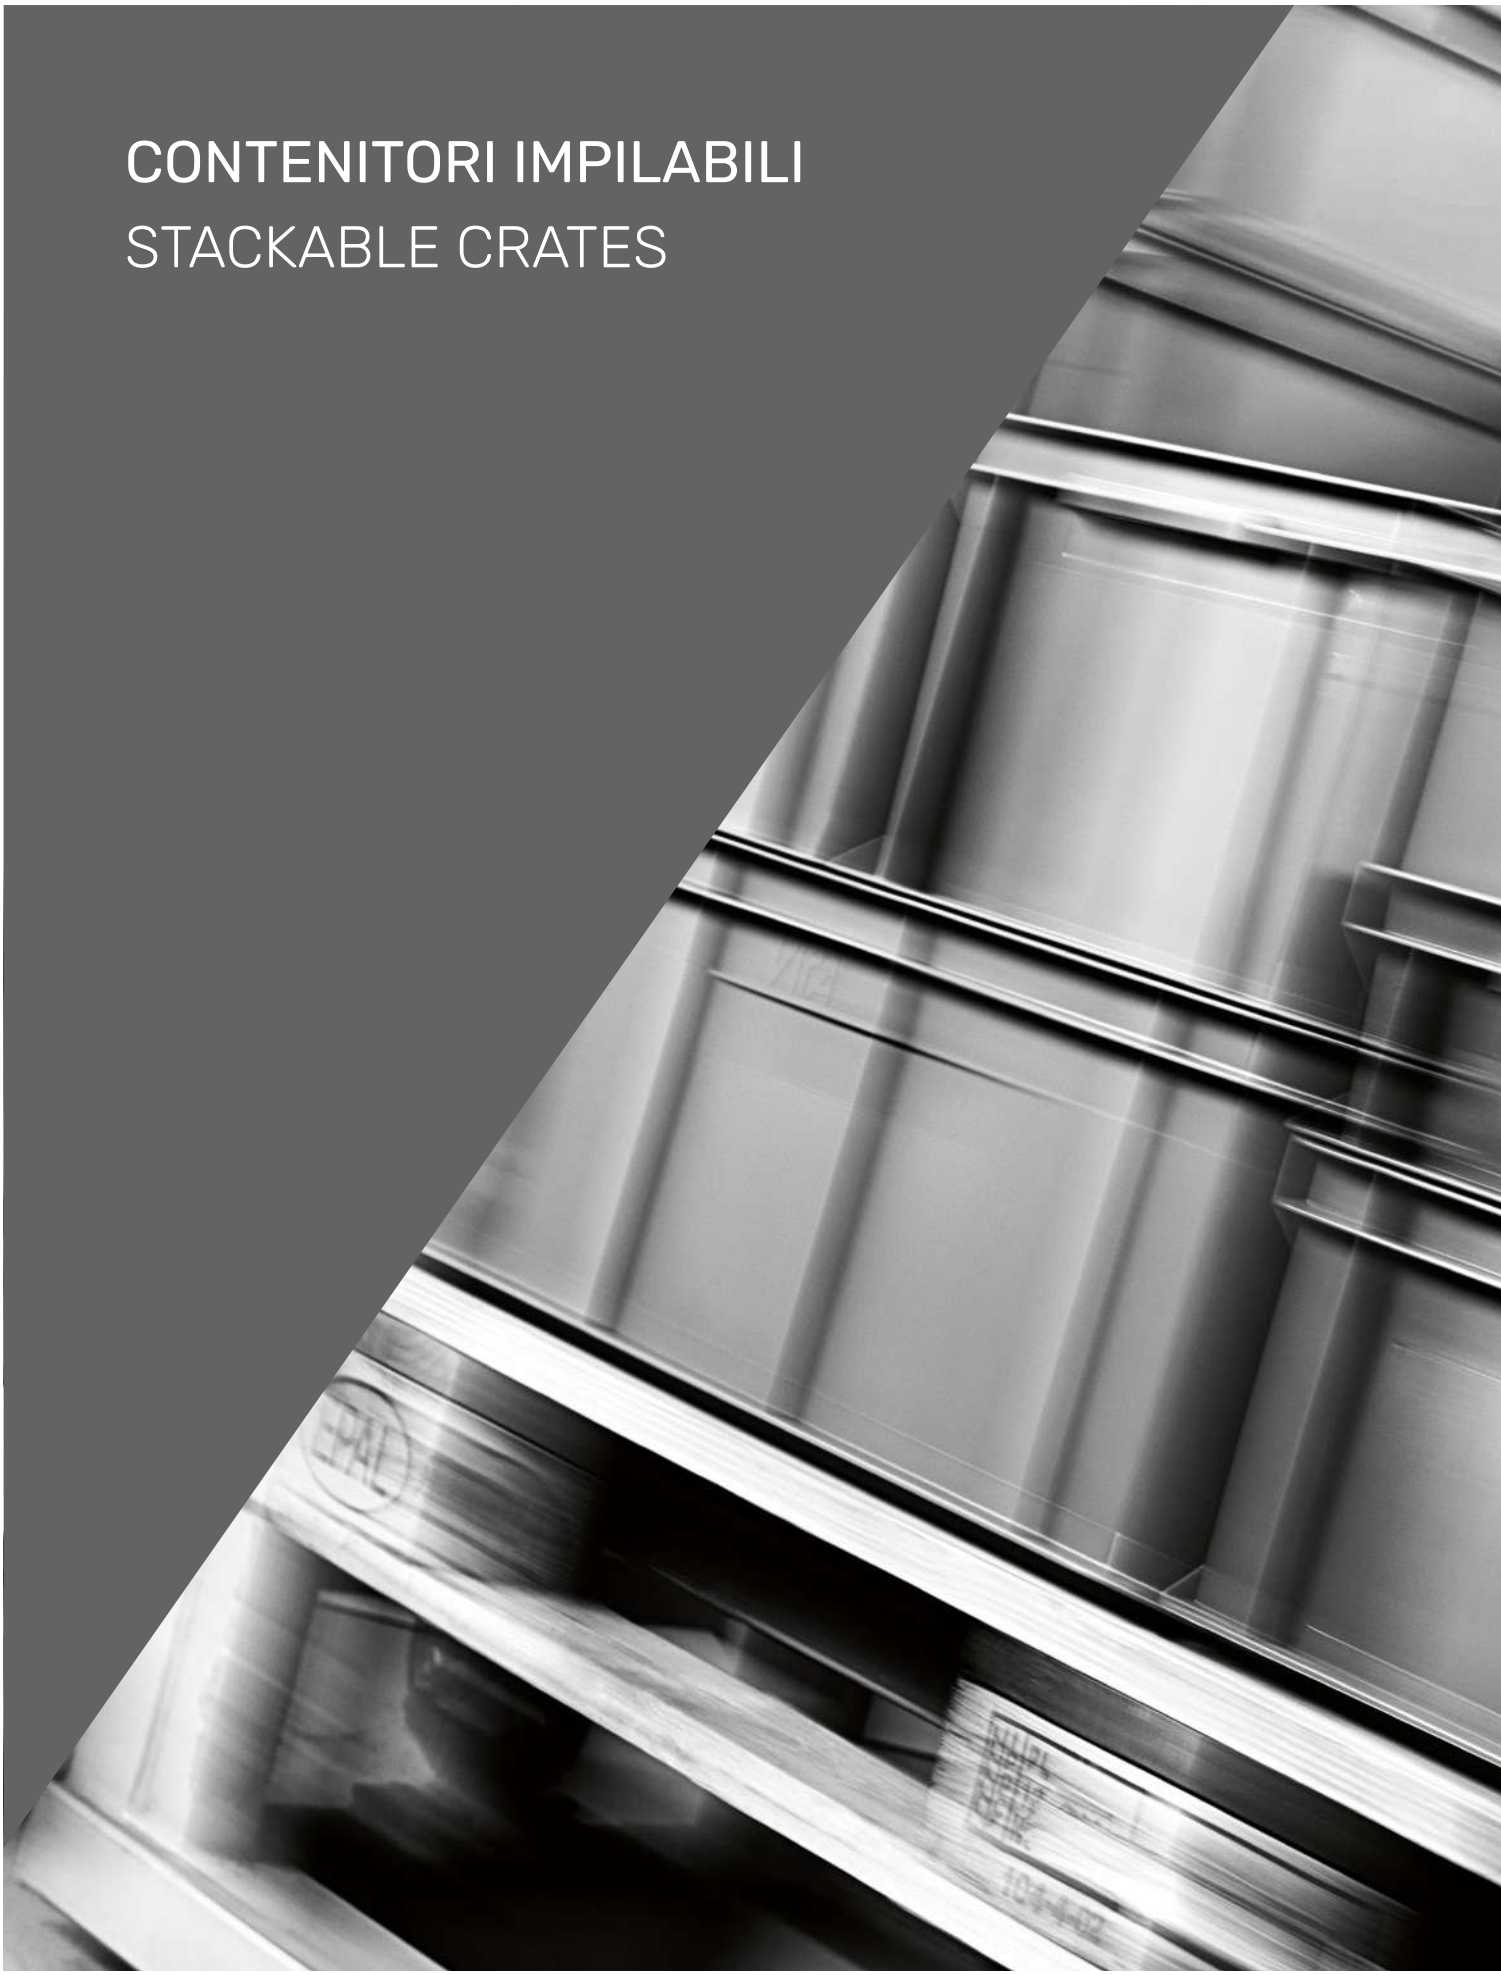

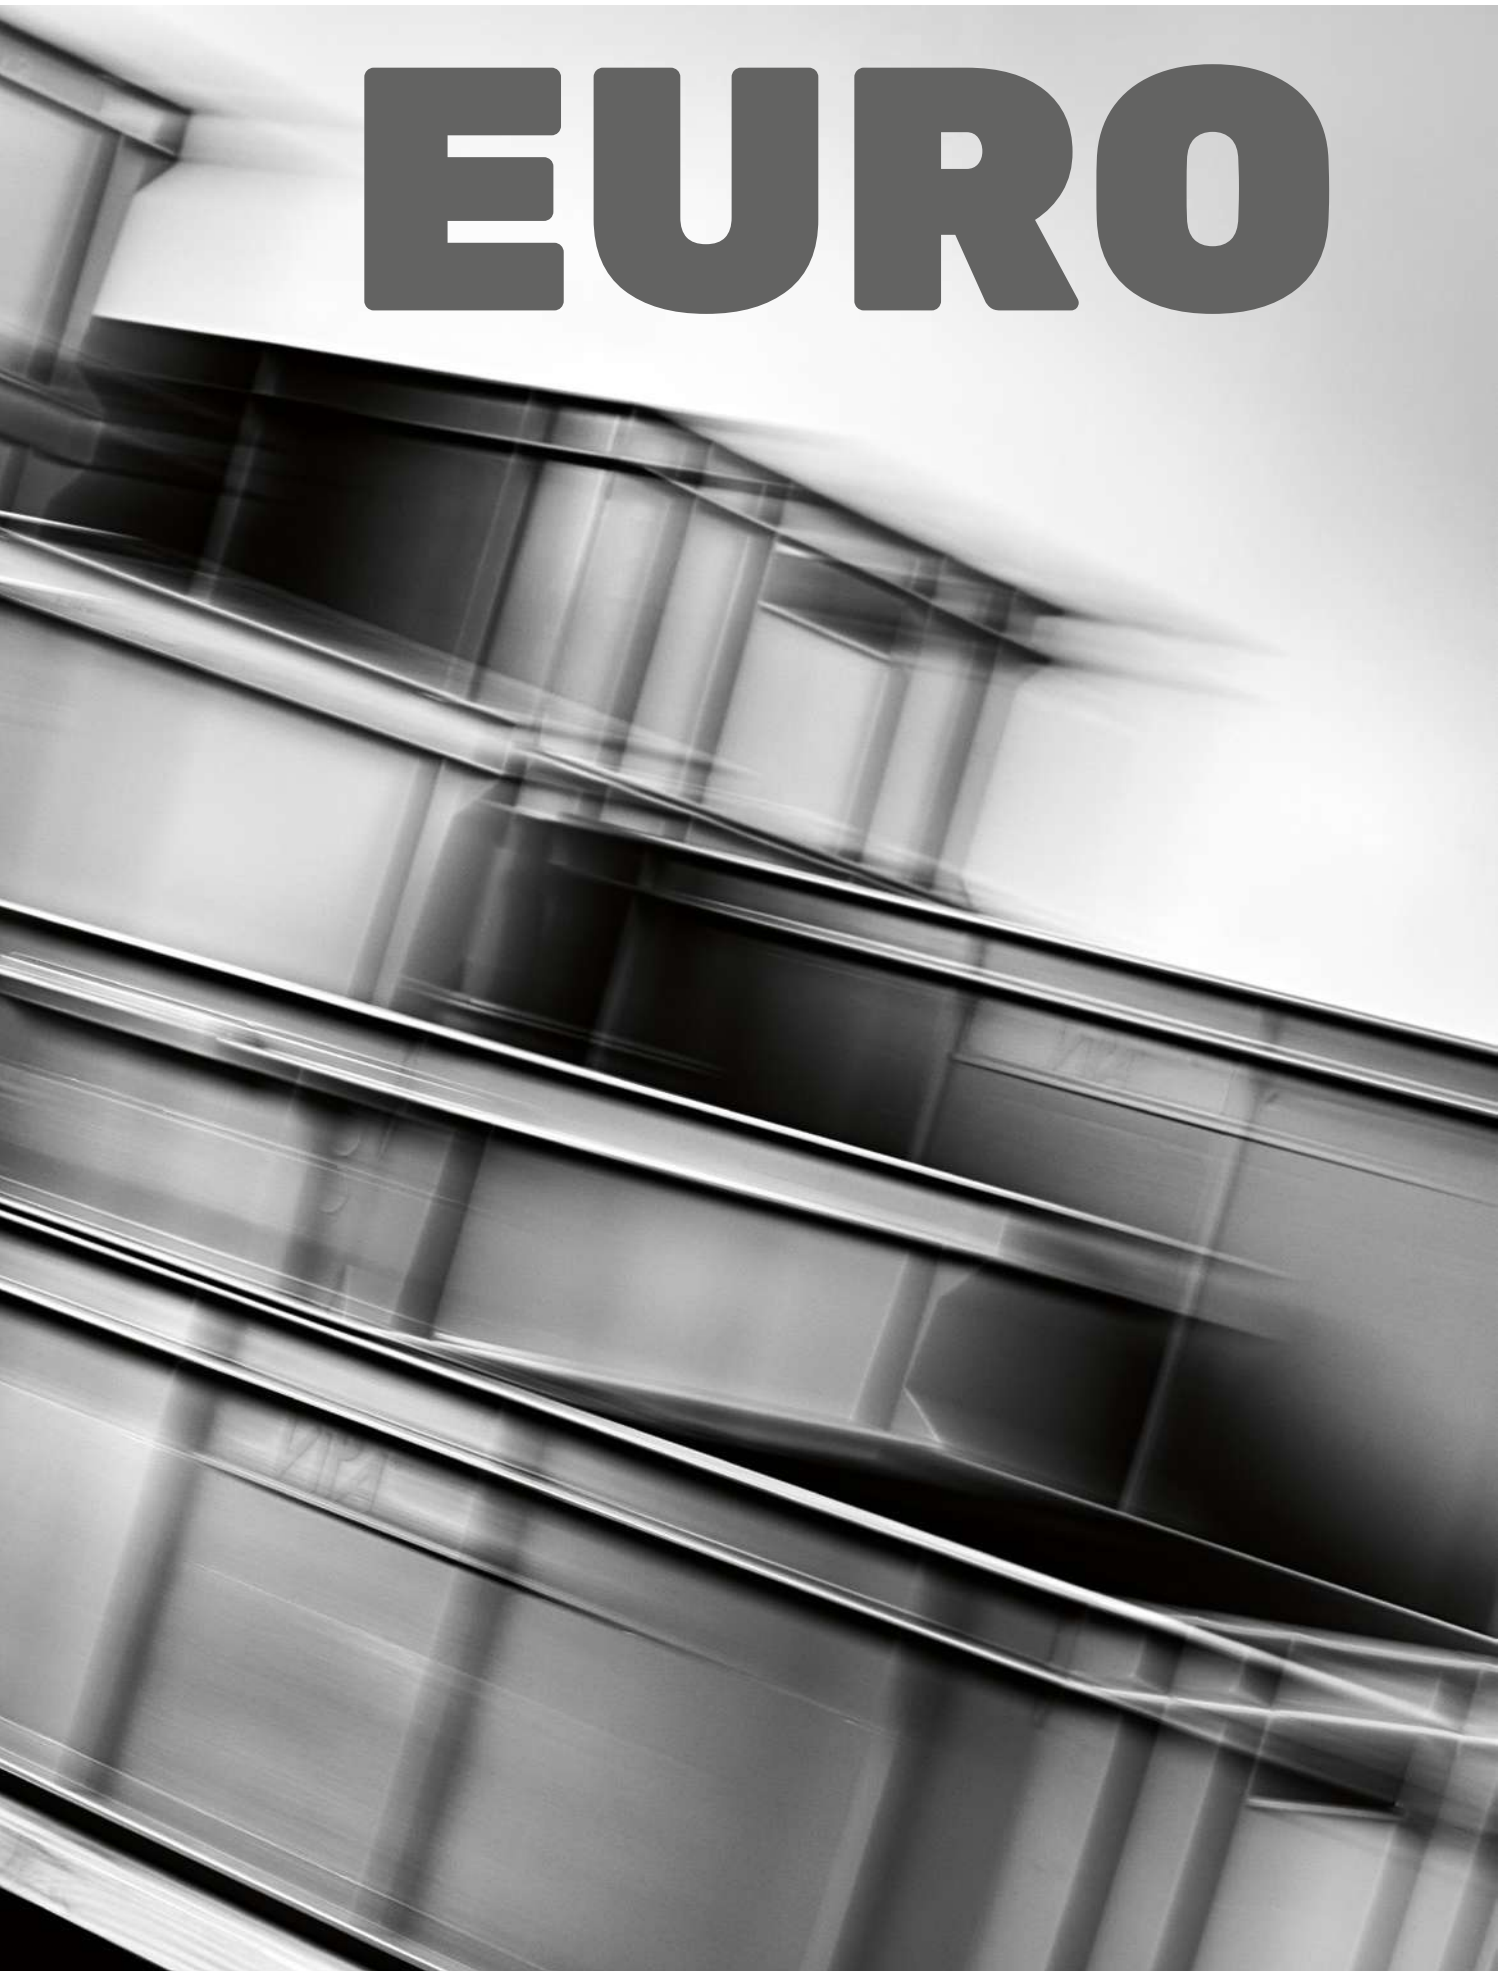
EURO

EXTRAORDINARILY STURDY

FOR YOUR STORAGE, PRODUCTION AND TRASPORT REQUIREMENTS

MAIN FEATURES

- TEN SIZES
- STACKABLE
- REINFORCED SIDES
- MAXIMUM RESISTANCE TO BUMPS AND HEAVY LOADS
- RESISTANT TO EXTREME TEMPERATURES FROM -20°C TO +90°C
- QUICK ACCESS TO SUPPLIES

STACK, STORE AND SAVE SPACE

- Extraordinarily sturdy
- High load capacity
- Highly versatile
- Suitable for roller conveyors and automatic handling systems
- Perfect on Euro pallets 800x1200 mm and 1000x1200 mm

STRAORDINARIAMENTE ROBUSTO

EURO

PER LE VOSTRE ESIGENZE DI STOCCAGGIO, PRODUZIONE E TRASPORTO

CARATTERISTICHE DISTINTIVE

- DIECI MISURE
- IMPILABILE
- LATI RINFORZATI
- MASSIMA RESISTENZA AGLI URTI E AI CARICHI PESANTI
- RESISTENTE A TEMPERATURE ESTREME DA -20°C A +90°C
- IDENTIFICAZIONE IMMEDIATA DEI CONTENUTI

IMPILA, ARCHIVIA E RISPARMIA SPAZIO

- Straordinariamente robusto
- Elevata capacità di carico
- Altamente versatile
- Indicato per rulliere e sistemi di movimentazione automatica
- Perfetto su Euro pallet 800x1200 mm e 1000x1200 mm

TECHNICAL DATA

CONTENITORI IMPILABILI - STACKABLE CRATES

ARTICOLO ITEM	DIM. ESTERNE EXT. DIMENSIONS			DIM. INTERNE INT. DIMENSIONS			IMBALLO PZ PCS./PACK	IMBALLO PZ PALLET PCS./PALLET	
	L	P	H	L1	P1	H1			
	W	D	H	W1	D1	H1			
	mm	mm	mm	mm	mm	mm			
E4312	400	300	120	370	270	115	1	150	
E4317	400	300	170	370	270	165	1	100	
E4322	400	300	220	370	270	215	1	100	
E4332	400	300	320	370	270	315	1	60	
E6413	600	400	130	570	365	125	1	85	
E6417	600	400	170	570	365	160	1	70	
E6420	600	400	200	570	365	190	1	50	
E6424	600	400	240	570	365	225	1	45	
E6432	600	400	320	570	365	305	1	30	
E6441	600	400	410	570	365	395	1	25	

LEGENDA
LEGEND

L P H
W D H
DIM. ESTERNE
EXT. DIMENSIONS

L1 P1 H1
W1 D1 H1
DIM. INTERNE
INT. DIMENSIONS

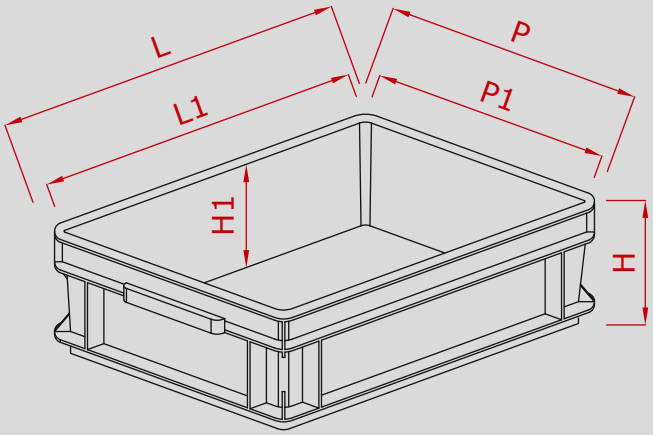

E4312 E4317 E4322 E4332

E6413 E6417 E6420 E6424 E6432 E6441

EURO

	PESO UNITARIO UNIT WEIGHT Kg	VOLUME UNITARIO UNIT VOLUME m^3	L	PORTATA MASSIMA MAX. LOAD Kg	COLORE COLOR	MATERIALI MATERIALS	RESISTENZA ALLA TEMPERATURA TEMPERATURE RESISTANCE
	0,64	0,014	11	15/20			-20°C +90°C
	0,90	0,020	16	15/20			-20°C +90°C
	1,01	0,026	21	15/20			-20°C +90°C
	1,41	0,038	31	15/20			-20°C +90°C
	1,56	0,031	26	15/20			-20°C +90°C
	1,79	0,041	33	15/20			-20°C +90°C
	1,90	0,048	40	15/20			-20°C +90°C
	2,16	0,058	47	15/20			-20°C +90°C
	3,16	0,077	64	30			-20°C +90°C
	4,39	0,098	82	30			-20°C +90°C

ACCESSORI - ACCESSORIES

ARTICOLO ITEM	DIMENSIONI DIMENSIONS L W mm	P D mm	H H mm	IMBALLO PZ PCS./ PACK	IMBALLO PZ PALLET PCS./ PALLET	PESO UNITARIO UNIT WEIGHT Kg	PORTATA MASSIMA MAX. LOAD Kg	COLORE COLOR	MATERIALI MATERIALS	RESISTENZA ALLA TEMPERATURA TEMPERATURE RESISTANCE
COPERCHI- LIDS										
E4300 C/G CON GANCI WITH HOOKS	400	300	28	1	100	0,44	-			-20°C +90°C
E4300 S/G SENZA GANCI WITHOUT HOOKS	400	300	23	1	100	0,43	-			-20°C +90°C
E6400	600	400	20	1	60	0,70	-			-20°C +90°C
E6400/SLOT	610	410	45	1	85	0,93	-			-20°C +90°C
CARRELLI - PICKING TROLLEY										
CARE/I - INOX	600	400	50*	1	25	8,00	250		INOX	-
CARE/P - PLASTIC	600	400	50*	1	50	2,90	250			-20°C +90°C

*** Altezza indicativa senza ruote**

* Approximate height without wheels

E4300 C/G


E4300 S/G

E6400


E6400/SLOT

CARE/I

CARE/P